



Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Vision Industry W152K NUVO

**Model:** W152KHR-2D

**Cod:** W82320216001

### Technical data

<b>Max capacity:</b>	3 trolleys GN2/1, EN60x80
<b>Temperature range:</b>	-40°+85°C
<b>Ventilation range:</b>	25% - 100%
<b>Humidity range:</b>	45% - 95% with humidifier
<b>Humidifier:</b>	Incluso
<b>Refrigerant unit:</b>	Remote
<b>Yield +90 / +3:</b>	780 Kg
<b>Yield +90 / -18:</b>	600 Kg
<b>Cooling gas:</b>	R404/R452
<b>Defrost:</b>	Forced air
<b>Valve:</b>	Electronic expansion valve
<b>Dimensions:</b>	1600×3640×2510 mm
<b>Packing dimensions:</b>	N°3× 2755×1730×1690 mm
<b>Gross weight:</b>	1.275 Kg
<b>Voltage:</b>	400-415 V - 50-60 Hz
<b>Total rate:</b>	13405 W
<b>Absorbed Current:</b>	43,33 A

### Remote unit technical data

<b>Voltage:</b>	400-415 V 3N - 50 Hz
<b>Cooling gas:</b>	R404-R452a
<b>HP unit:</b>	44
<b>Gross weight:</b>	1150 Kg
<b>Dimensions:</b>	3100×1300×1800 mm
<b>Cooling capacity:</b>	Evap. -10°C Cond. +45°C

### Features

<b>Functions:</b>	Blast chilling, shock freezing, thawing, proving and retarder prover, holding, steam pasteurisation, low temperature steam cooking, steam sanitizing, manual steam cycle
<b>Control:</b>	7" touch screen display with USB port
<b>Doors:</b>	Dictator closure to absorb sudden changes in pressure when opening and closing doors
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Core probe:</b>	Needle probe with 1 reading point, quick-release and easily replaceable
<b>Insulation:</b>	100 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Internal and external in "linen canvas" steel
<b>Inner corners:</b>	Rounded base 20 mm
<b>Handle:</b>	In AISI 304 stainless steel
<b>Cosmo:</b>	Wi-Fi remote control system

## Accessories and variants

Pavimento h 20 mm, rampa di accesso inclusa
Reverse door opening from standard
Door opening turning and control panel inversion
Door stop 100°
Sonda al cuore 3 punti di lettura
Sonda al cuore riscaldata 1 punto di lettura
Winter kit -20°C
Winter kit -40°C
Other special voltage
Unità condensante 6FE-44Y abb. W152K-W150LK carenata sil.
Unità condensante 6FE-44Y abb. W152K-W150LK carenata cond. remoto
PVC ventilation profiles W150K
Ramp 100 mm high. Length 913 mm W40
Ramp 140 mm high. Length 1390 mm W40
Trolley GN1/1 20 trays 598x530x1630 mm
Trolley EN60x40 20 trays 460x620x1750 mm
Trolley GN2/1 20 trays 660x720x1750 mm
Trolley EN60x80 20 trays 660x820x1750 mm


Purity C Quell ST 50 filter cartridge
Sanitizing detergent

### COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect, update and monitor with a smartphone the VISION blast chiller. VISION is also a Cosmo hub and allow remote supervision of the Coldline devices connected to it. From the app you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

\*The installation requires a kit for the replacement of the racks

## Technical draw

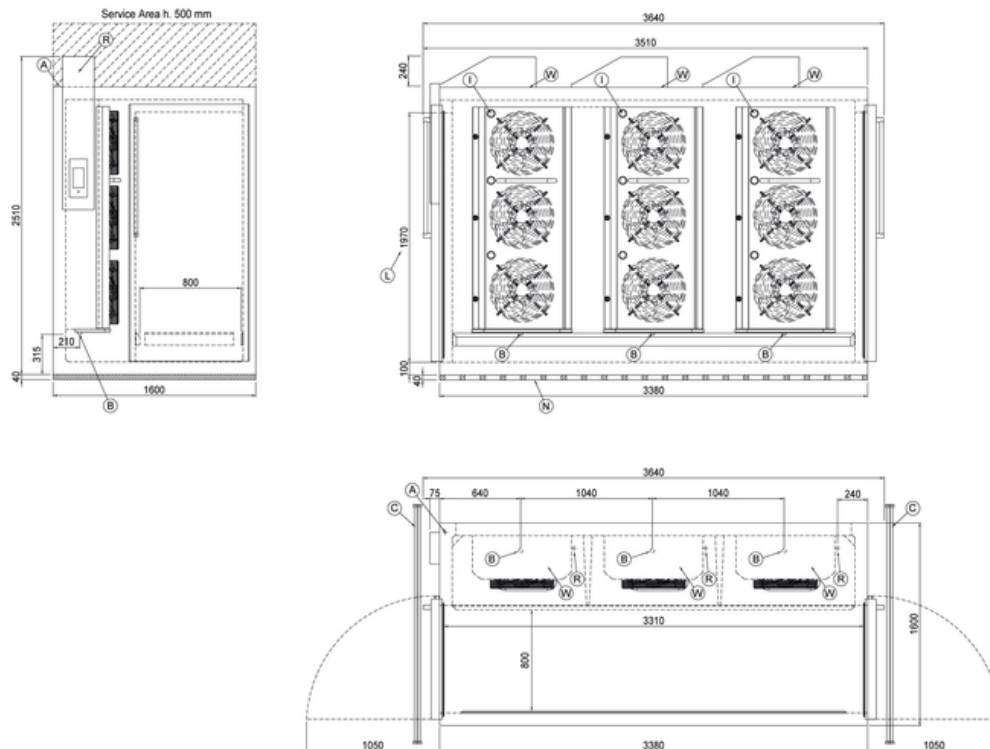

- |                                     |                                                                                       |                                                            |
|-------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------|
| <b>A:</b> Power supply cable outlet | <b>B:</b> Condensation water drain                                                    | <b>C:</b> Floor grid for condensate drainage (recommended) |
| <b>I:</b> Internal led lighting     | <b>L:</b> Door clear opening dimension                                                | <b>N:</b> PVC ventilation profiles                         |
| <b>R:</b> Gas output pipes          | <b>W:</b> Water mains connection for humidifier - 3/4" female. Unloading not required |                                                            |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.